


QY-2.92KL40-2W-GD

【一、产品参数Parameters/规格指标Specifications】

频率范围 Frequency Range	DC-40 GHz
驻波比 VSWR	1.30:1 (max)
功率 Power	2W
阻抗 Impedance	50 Ω
介质耐电压 Dielectric Withstand Voltage	1000 V
使用寿命 Service Life	≥500
绝缘电阻 Insulation Resistance	≥5000MΩ
接头类型 Connector Type	2.92mm-Female
工作温度 Operation Temperature	-55℃ ~ +125℃
内导体材质 Inner conductor material	铍青铜 镀金 Beryllium bronze Gold plating
外导体材质 External conductor material	不锈钢 钝化 Stainless Steel Passivated
螺套材质 Material of screw sleeve	不锈钢 钝化 Stainless Steel Passivated
外壳材质 Shell material	黄铜 镀金 Brass Gold Plated

【二、规格草图Draft specifications】

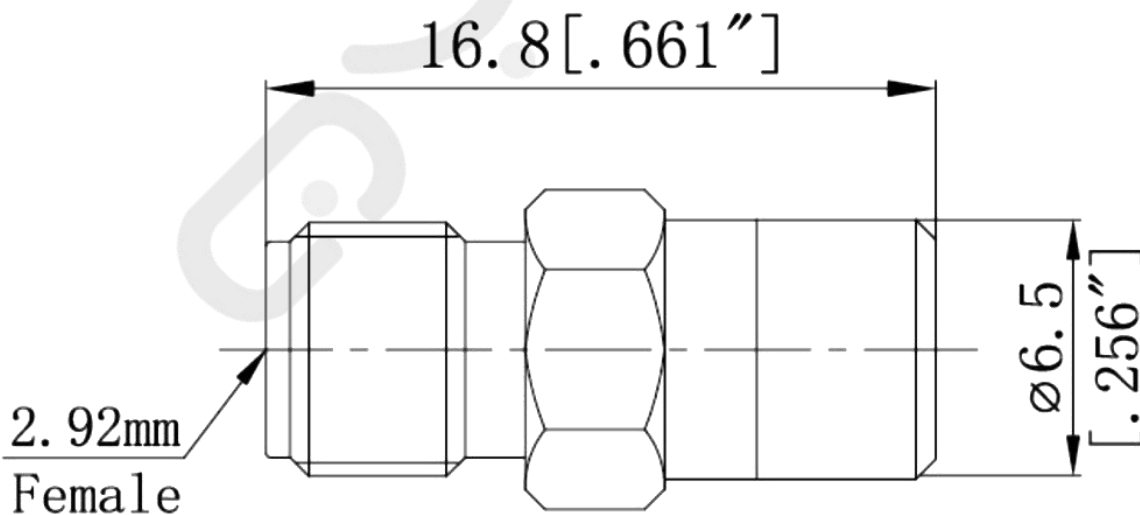

注: 尺寸(mm/[英寸]), 一般公差(± 0.1)

Note: Dimensions (mm / [inch]), General tolerance (±0.1)